


MK-X PROJECTOR SPECIFICATIONS

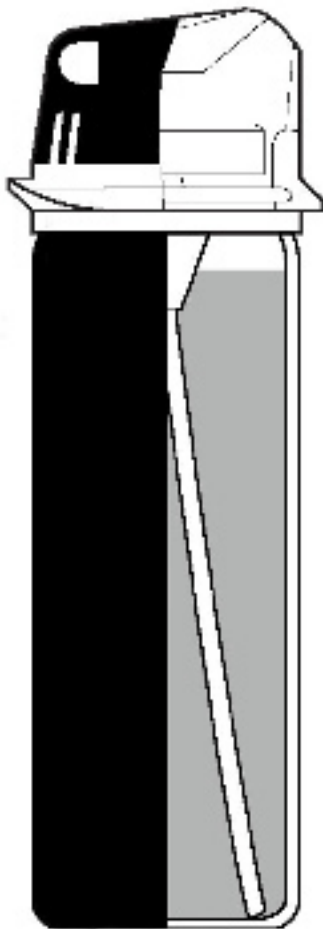

SPECIFICATIONS

Subject to change without notice.

Height: 4.88" / 12.40 cm

Diameter: 1.37" / 3.48 cm

Fluid Ounces: 2.48 oz / 73.34 ml

Firing Mechanism: Spring-loaded flip-top

Warranty: Five (5) years from date of manufacture

Canister Material: Seamless Aluminum Rated 2Q

U.S. DoD

Active Ingredient:	5.5% capsaicin
Scoville Heat Units:	2,000,000
Scoville Value:	110,000
Total Capsaicinoids:	0.69%
Delivery System / Part ID:	Tactical Stream™/55X11 Stream / 55X12 Cone / 55X13 Pro-Foam™ / 55X14 Fog / 55X15

LEVEL III

Active Ingredient:	10% capsaicin
Scoville Heat Units:	2,000,000
Scoville Value:	200,000
Total Capsaicinoids:	1.25%
Delivery System / Part ID:	Tactical Stream™ / 54X11 Stream / 54X12 Cone / 54X13 Pro-Foam™ / 54X14 Fog / 54X15

LEVEL II

Active Ingredient:	5% capsaicin
Scoville Heat Units:	2,000,000
Scoville Value:	100,000
Total Capsaicinoids:	0.62%
Delivery System / Part ID:	Tactical Stream™ / 53X11 Stream / 53X12 Cone / 53X13 Pro-Foam™ / 53X14 Fog / 53X15

LEVEL I

Active Ingredient:	10% capsaicin
Scoville Heat Units:	500,000
Scoville Value:	50,000
Total Capsaicinoids:	0.31%
Delivery System / Part ID:	Tactical Stream™/52X11 Stream / 52X12 Cone / 52X13 Pro-Foam™ / 52X14 Fog / 52X15

Labeled in accordance with AOAC 995.03 and ASTA 21.3 in their most current editions.