


MK-6 PROJECTOR SPECIFICATIONS

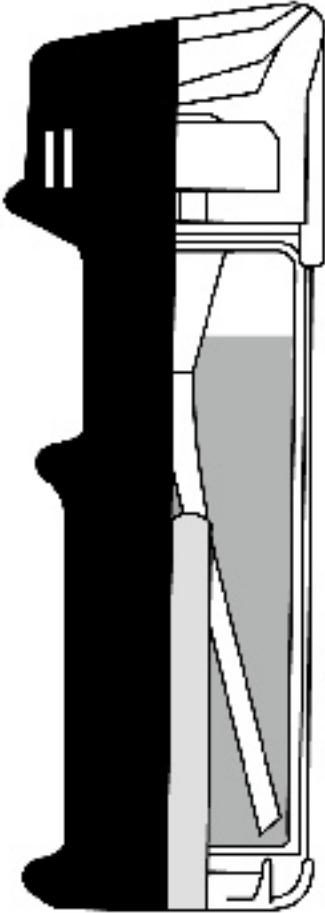

SPECIFICATIONS

Subject to change without notice.

Height: 4.62" / 11.73 cm

Diameter: 1.38" / 3.51 cm

Fluid Ounces: 0.85 oz / 25.13 ml

Firing Mechanism: Spring-loaded flip-top

Warranty: Five (5) years from date of manufacture

Canister Material: Seamless Aluminum Rated 2Q

U.S. DoD

Active Ingredient:	5.5% capsaicin
Scoville Heat Units:	2,000,000
Scoville Value:	110,000
Total Capsaicinoids:	0.69%
Delivery System / Part ID:	Tactical Stream™/n/a Stream / 55612 Cone / n/a Pro-Foam™ / 55614 Fog / n/a

LEVEL III

Active Ingredient:	10% capsaicin
Scoville Heat Units:	2,000,000
Scoville Value:	200,000
Total Capsaicinoids:	1.25%
Delivery System / Part ID:	Tactical Stream™ / n/a Stream / 54612 Cone / n/a Pro-Foam™ / 54614 Fog / n/a

LEVEL II

Active Ingredient:	5% capsaicin
Scoville Heat Units:	2,000,000
Scoville Value:	100,000
Total Capsaicinoids:	0.62%
Delivery System / Part ID:	Tactical Stream™ / n/a Stream / 53612 Cone / n/a Pro-Foam™ / 53614 Fog / n/a

LEVEL I

Active Ingredient:	10% capsaicin
Scoville Heat Units:	500,000
Scoville Value:	50,000
Total Capsaicinoids:	0.31%
Delivery System / Part ID:	Tactical Stream™/ n/a Stream / 52612 Cone / n/a Pro-Foam™ / 52614 Fog / n/a

Labeled in accordance with AOAC 995.03 and ASTA 21.3 in their most current editions.